

CUSTOM L-SHAPED TOP RAIL PAD




Specifications

Vinyl Covering: 18oz./sq. yd. fully coated vinyl on base fabric scrim of 1,000 denier x 1,300 denier polyester. Fabric meets following tests: Tear Strength Tests: Warp 100 lbs., Fill 100 lbs., Grab Tensile Strength: Warp 410 lbs., Fill 410 lbs., Weft Insertion: 18 x 17. Vinyl compounded with UV inhibitors and mold inhibitors. Cold Crack: Minus 40 degrees F°.

Foam: 3" polyurethane foam

Grommets: every 8" on center

Custom Sizing: Fit to project specification

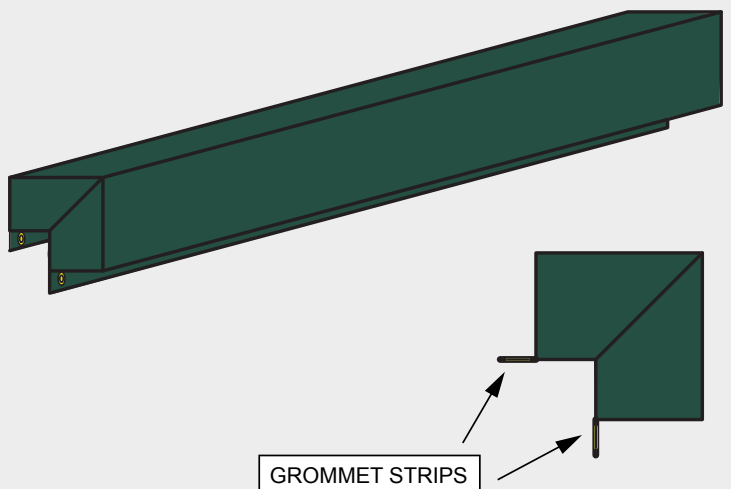

800-823-7356
AerFloSports.com